

MERIT BADGE SERIES



ELECTRICITY



The page is decorated with numerous circular merit badge patches from Scouting America. These patches feature various designs including a camera, a cross, a fleur-de-lis, a tree, a globe, a fish, a campsite, a person in a canoe, crossed paddles, a person climbing, a tent, a fork and spoon, a film clapperboard, and a person with a backpack. The patches are arranged around the central text, with some overlapping.

How to Use This Pamphlet

The secret to successfully earning a merit badge is for you to use both the pamphlet and the suggestions of your counselor.

Your counselor can be as important to you as a coach is to an athlete. Use all of the resources your counselor can make available to you. This may be the best chance you will have to learn about this particular subject. Make it count.

If you or your counselor feels that any information in this pamphlet is incorrect, please let us know. Please state your source of information.

Merit badge pamphlets are reprinted annually and requirements updated regularly. Your suggestions for improvement are welcome.

Who Pays for This Pamphlet?

This merit badge pamphlet is one in a series of more than 100 covering all kinds of hobby and career subjects. It is made available for you to buy as a service of the national and local councils of Scouting America. The costs of the development, writing, and editing of the merit badge pamphlets are paid for by Scouting America in order to bring you the best book at a reasonable price.

Send comments along with a brief statement about yourself to
Program Development Department
Scouting America • 1325 West Walnut Hill Lane • Irving, TX 75038 If you
prefer, you may send your comments to merit.badge@scouting.org

SCOUTING AMERICA
MERIT BADGE SERIES

ELECTRICITY



"Enhancing our youths' competitive edge through merit badges"

Scouting  America



Requirements

Scouts should go to scouting.org/merit-badges/electricity or check Scoutbook for the latest requirements.



Scan this QR code for the latest Electricity requirements.

Contents

What Is Electricity?.....	5
Forms of Electricity.....	9
Common Electrical Terms	25
Current in Motion	31
Responding to Electrical Emergencies.....	61
Careers in Electricity.....	71
Electricity Resources	74



What Is Electricity?

Electricity is a powerful and fascinating force of nature. As early as 600 B.C., observers of the physical world suspected that electricity existed but did not have a name for it. In fact, real progress in unraveling the mystery of electricity has come only within the last 250 years. Important discoveries by scientists such as Benjamin Franklin, who proved that lightning is a tremendously powerful electrical spark, have given us a more complete picture of what electricity is and how we can harness its power.

To begin to understand electricity as an awesome force, one must start with the basics. Electricity is a rapid transfer of charged particles called electrons, which create levels of energy depending upon how they transfer.

Atoms

All things are made of tiny particles called atoms. You are made of atoms, and so are your friends, your clothes, the food you eat, and the air you breathe. Atoms are so small that it takes millions of them to form the period at the end of this sentence.

Every atom is made up of even tinier particles called protons, neutrons, and electrons. Protons are positively charged, and neutrons are neutral—they have no charge. Together, protons and neutrons form the nucleus, or core, of an atom. Electrons, which are negatively charged, speed around the nucleus, orbiting it in layers called shells.


The positive charge of the protons in the nucleus equals the total negative charge of the electrons in orbit. This makes the atom neutral, or balanced. Protons and electrons have a natural attraction to each other, which helps to keep the atom stable. Much as the gravitational force of the sun holds planets in their orbits, electrical forces hold electrons around the nucleus.

It is important to understand the atom's structure because the electrical charge of the electron is the basic unit of electricity. The position and movement of positively and

The word *electricity* comes from *electron*, the Greek word for amber.

negatively charged particles cause the electric and magnetic effects you will be working on to earn your Electricity merit badge.

Atom

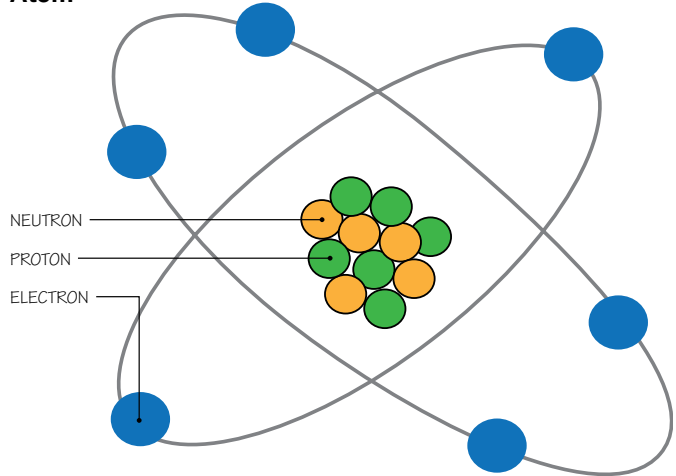


To picture the structure of an atom, think about the arrangement of our solar system. Just as planets orbit the sun, electrons move around the nucleus of an atom.

Ions and Balance

The bond that holds electrons in orbit is weakest in the atom's outermost shells. A free-moving electron can bump into and knock electrons out of an atom's outermost shell. These loose electrons, in turn, can bump into still other atoms and dislodge more electrons. Moving together, these freed electrons form electric current.

Electrons are easily dislodged from, or rubbed off of, an atom because they are lightweight and, in the outermost shells, accessible. (Protons are heavy and do not rub off easily.) Imagine electrons as grains of dust spinning swiftly around a central core of iron. You can see why the lightweight, negatively charged electrons are constantly rubbing off or being lifted by nearby atoms and ions.

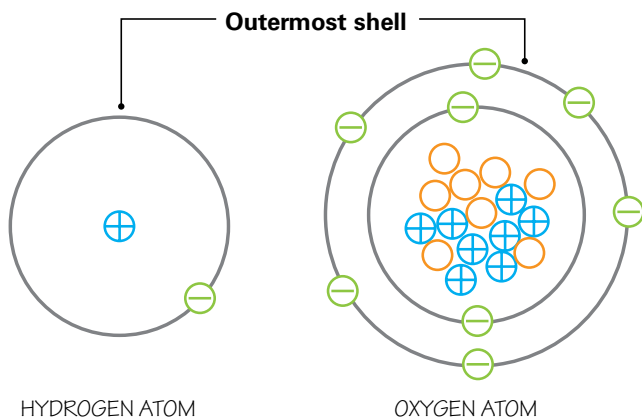

When an atom loses one or more of its electrons, the atom becomes positively charged, or out of balance. If an atom gains free-moving electrons, it becomes negatively charged, and also out of balance. Out-of-balance atoms are called ions.



Forms of Electricity

Have you ever watched with wonder as lightning lit up the night sky during a thunderstorm? Have you ever combed your hair on a cold day and heard it crackle? Have you ever pulled a clingy sock away from your T-shirt as it was removed from a warm dryer? All these phenomena are examples of electricity.

Static Electricity

Try this experiment. Shuffle across a thick carpet on a dry day and then lightly touch a doorknob. You will jump. You might even see a spark. The crackling noises and sparks indicate the presence of static electricity.

Static electricity is electricity transferred by rubbing objects together. It can be stored on the surface of materials like rubber, glass, cloth, and amber. The electrical charge builds up until it discharges, or jumps. The sparks and crackling noises are static electricity in motion.

Thales of Miletus (625–547 B.C.), an ancient Greek philosopher, knew rubbing amber, or fossilized tree resin, with a piece of wool or fur would make a small, lightweight object like a feather fly up and cling to it. Rubbing makes the amber electrically negative and able to exert force over a distance, like a magnet. As the charge is lost, the amber loses its attraction and the feather floats back down.

While Thales did not completely understand the force that attracted a feather to rubbed amber, he recorded some of the first observations of magnetism and electricity. The word *electron* comes from the Greek word for amber.



When you comb your hair and produce static electricity, loose electrons are rubbing off the hair atoms and clinging to the atoms of the comb. Losing electrons leaves the hair atoms positively charged; gaining extra electrons makes the comb negatively charged. Because different (unlike) charges attract each other, your hair tries to stick to the comb.

Unlike charges attract; like charges repel, similar to the way unlike poles of magnets attract while the like poles repel. Try this experiment: Rub two inflated balloons against your sweater and tie them to a stick with the rubbed sides facing each other. Because both balloons have the same charge they will swing away from, or repel, one another.

Rubbing, or friction, does not create static electricity; it merely separates negative and positive charges and transfers them onto different bodies, or onto different parts of the same body.

A static charge is an accumulated electrical charge on an object. It is capable of producing a spark that can cause an explosion. For example, when filling the gas tank of a car or boat, you must keep the pump nozzle in constant contact with the fill pipe to prevent a static charge (a spark) from igniting gas fumes.

When objects out of electrical balance approach each other, a spark may jump from one to the other, which is what happened when you shuffled across the carpet and touched the doorknob. Electrons jumped from an object overcharged with electrons to an object short of electrons.

Lightning

Lightning is caused by static electricity. As positive and negative charges become separated during a thunderstorm, they build up in different parts of the clouds. Eventually, they jump the gap between regions of opposite charge, discharging their buildup. The discharge is lightning—a mighty stream of electrons leaping through the sky. Some lightning bolts strike the ground, but most jump from one part of a cloud to another.

Electrostatic Generators



Electrostatic generators, created in England by Francis Hauksbee (1666–1713), generated significant amounts of electrical charge. One such machine used the friction created from leather pressing on a revolving glass cylinder to produce an electrical charge, which in turn was transferred to a metal comb. The electrical charge then traveled from the comb to an attached metal ball, and then into a Leyden jar for storage.



Ben Franklin's original lightning rod, above; modern-day lightning rod, below

Ben Franklin's Kite

After watching lightning jump from cloud to cloud and from cloud to ground, American statesman and scientist Benjamin Franklin (1706–1790) determined that an electrical charge was like a fluid seeping through an object, and that it could jump to another object, making a spark. To prove his point, he tied a metal key to a kite and flew it in a sky threatening a thunderstorm. The electrical charge from lightning leapt to the key and produced a spark of electricity. Franklin was lucky to survive the risky experiment, but he proved that lightning is a form of electricity. After his experiment, he invented the lightning rod, an iron rod that would safely conduct lightning from the top of a building to the ground.

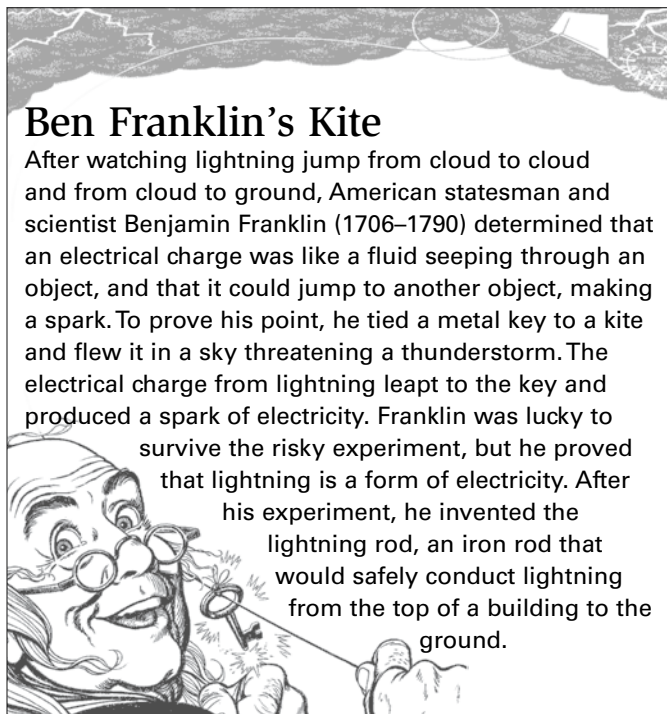



Named for the university in the Netherlands where it was invented, the Leyden jar was the first storage container for electricity. The charge could not pass through the glass so it built up inside. If a metal rod was held near the jar, the charge leapt from a metal ball on top through a discharger to the outer metal coating on the jar, causing a spark.

Modern devices that store electrical charge are called capacitors. They are found inside many household appliances, from washing machines to CD players. Though most are the size of a dime, they generally follow the same principle as a Leyden jar.

Magnetism

Electricity and magnetism, although they seem quite different, are actually two forms of the same force. An electric *current* produces magnetism. To put it another way, whenever electricity moves, magnetism is produced. And whenever a magnetic force field changes, electricity is produced.

William Gilbert (1544–1603), a doctor to England's royal family, wrote about magnetism and electricity in 1600. He was the first person to use the word "electric," and he invented what is believed to be the earliest electrical instrument. The device had a pointer, which would swing toward objects like straw and paper that carried an electrical charge when rubbed. He named objects that attracted the pointer "electrics," and those that did not "nonelectrics."

Gilbert believed there were two types of electricity. Glass rubbed with silk made what he called vitreous electricity. Amber rubbed with fur made resinous electricity. Gilbert showed that objects with the same type of electricity repelled each other, while those containing different kinds attracted each other.

Electromagnetism

Italian Alessandro Volta (1745–1827) thought electricity came only from contact between two metals; he called it metallic electricity. He was not absolutely correct, either. But Volta did invent the earliest electric cell, which became known as the voltaic pile. It used two different metals, separated by moist chemicals, to produce a continuous transfer of electrical charge. When the charge transferred along wires, the chemicals separated out more electrical charge. By piling up lots of cells, Volta created the first battery, with every set of cells producing slightly more than 1 volt of electricity.




***Volt**, the modern unit of electric potential, is the strength or electric pressure of the transferring charge. Today's high-voltage power lines operate at 500,000 volts or more while a modern house circuit operates at 110 or 220 volts.*

With Volta's invention of the battery in 1800, scientists finally had a source of steady electric current that could be transferred. Twenty years later, Copenhagen researcher Hans Christian Oersted (1777–1851) linked electricity and magnetism, observing that a metal wire carrying electrical current affected a magnetic compass needle. Instead of following Earth's north-south magnetic field, the needle aligned itself with the electrified wire's magnetic field. Oersted's discovery that the electric current had produced magnetism became known as electromagnetism. This new scientific field would become the springboard for development of the electric motor and the electromagnet.

Making Connections

Inspired by Oersted's discovery, André-Marie Ampère (1775–1836), a Frenchman, set out to explain the connection between electricity and magnetism. Ampère's work led to a much fuller understanding of the relationship between electricity and



magnetism, which eventually led to important applications such as the telegraph and electromagnet.


He found that when electricity passed through a metal wire onto a card containing iron filings, and the card was tapped lightly, the filings lined up in a circular pattern around the magnetic field created by the electrified wire. When the electric current was turned off, the filings again relaxed into their random arrangement on the card.

THE AMPERE

With further experimentation, Ampère discovered that two parallel electric currents running in the same direction attract each other, and that parallel currents running in opposite directions repel each other. The modern unit of current, the *ampere*, was named in his honor.

Electromagnets

In 1825, William Sturgeon (1783–1850) wound a coil of wire around an iron rod and built one of the first electromagnets. It differed from a permanent magnet as its magnetism could be switched on and off by electrical current.

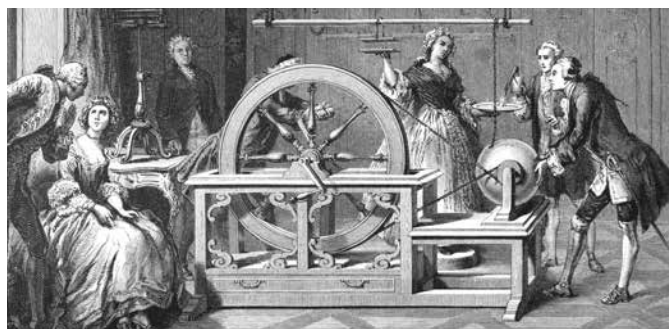

Demonstrations of electricity's properties were of great scientific interest in the 18th and early 19th centuries.


Stephen Gray (1666–1736), a British scientist, figured out that any object that touches an electrified object will itself become electrified. This process—transferring a charge from one substance to another—is known as electrical conduction.



Important Safety Notes


In your experiments, always use batteries as the power *source*. **Do NOT use electricity from household circuits;**

it is dangerous and can cause serious injury. Never work on household *circuits* without first turning off the *circuit breaker*, and *always* work on electricity with the help of an electrician or an otherwise qualified adult.

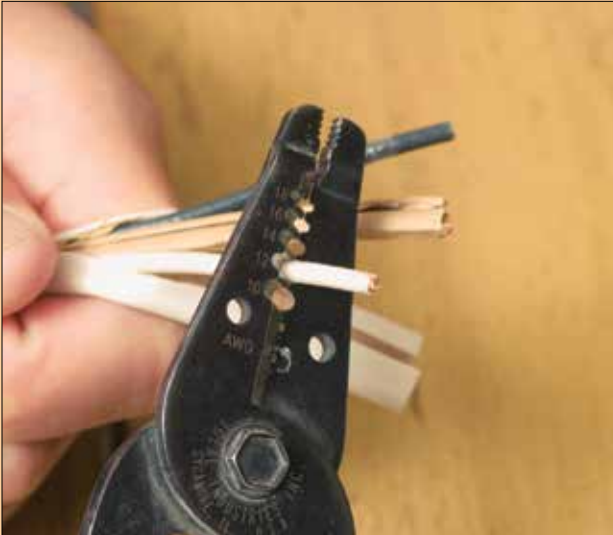

Wires. To prepare insulated wires for experiments, you must carefully strip some of the plastic coating (*insulation*) from each end to expose the metal. Use an electrician's wire stripper, or gently cut the plastic with a pocketknife. If you use stranded wire rather than solid-core, twist the strands tightly clockwise.

Connections. Join wires and batteries together with electrician's tape, metal paper clips, alligator clips, or mating crimp connectors. Make sure metal parts touch tightly or your experiments will not work.

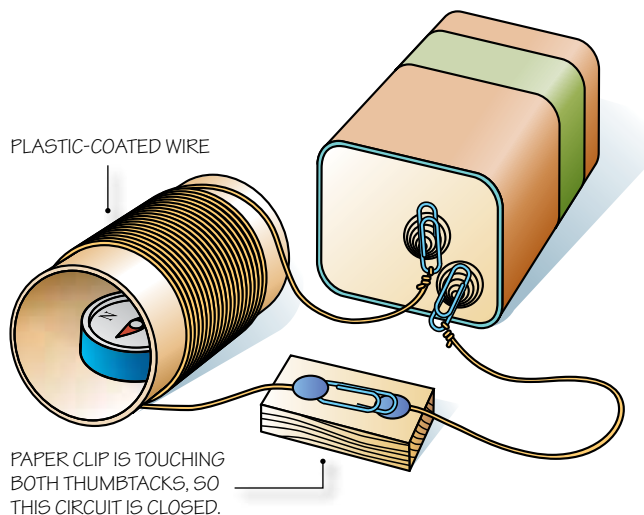

Make a Simple Electromagnet

This experiment shows that a wire carrying a current is surrounded by an invisible magnetic field, or force, and it illustrates how closely electricity and magnetism are related.

Step 1—Wrap a length of insulated (plastic-coated) wire about 20 times around a cardboard tube.

Step 2—Strip insulation at wire connections before connecting the wire to a 4.5-volt or 6-volt battery and to a switch made from a small block of wood, two thumbtacks and a paper clip.

You may use a switch bought at a store.

Step 3—Slide a small compass into the middle of the cardboard tube.

Step 4—Swivel the paper clip against and away from one thumbtack to switch the electric circuit on and off.

Step 5—Turn the compass around and retry. Does the compass arrow go the same way? Why?

Watch what happens to the compass needle as you open and close the circuit. When you close the circuit, the electric current produces magnetism in the coil of wire. The magnetism all around the wire makes the compass needle swing. When the circuit is broken (you open the paper-clip *switch*), no magnetism is produced so the needle again points north.

Magnet Earth

Did you know that you live on what is essentially a huge magnet? Earth, like any magnet, has magnetic north and south poles. What we call the magnetic north pole is located near Bathurst Island, north of Hudson Bay in Canada—more than a thousand miles south of the geographic North Pole. What we commonly call the magnetic south pole is near the Adélie Coast of Antarctica, about 1,600 miles from the geographic South Pole.

Natural and Artificial Magnets

Magnetic iron ore is found in different parts of Earth. This magnetite, or lodestone, is one example of a natural magnet. In the early Middle Ages, sailors learned that when a slender piece of iron was rubbed on a chunk of magnetite, the iron would become temporarily magnetized. If a piece of hard steel is rubbed on lodestone, the steel will remain magnetized for a long time, becoming a permanent artificial magnet.

Magnetic Attraction and Repulsion


One end of a magnet is its south pole; the other end, its north pole. If you hang a magnet on a string, one end will always point north. You can use a hanging magnet to demonstrate the law of attraction and repulsion. Bring the north pole of another magnet toward the north pole of a magnet on a string. The hanging magnet will spin around until its south pole meets the north pole of the magnet in your hand. Like poles repel each other. Unlike poles attract.

Magnets are either permanent or temporary.

Permanent magnets are made of hard steel and retain their magnetic effect for a long time. Temporary magnets are made of soft iron or a soft grade of steel and retain their magnetism only when they are in contact with another magnet or are being energized by an electric current.

Because of changes in Earth's magnetic field, the magnetic poles are not specific locations but general areas. Studies over a period of many years show that the magnetic poles change location with time.

When you cut off the electric current from an electromagnet, it is no longer magnetized. An electromagnet with a metal core is what operates door-bells, buzzers, CD player speakers, and telegraph instruments.

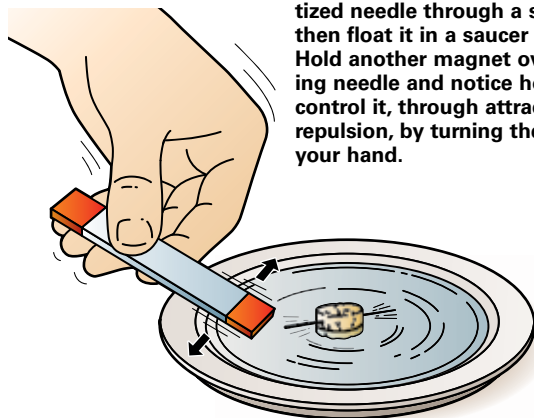

Try this experiment: Stick a magnetized needle through a small cork, then float it in a saucer of water. Hold another magnet over the floating needle and notice how you can control it, through attraction and repulsion, by turning the magnet in your hand.

The Magnetic Field

In the floating needle experiment, you found what seemed like an invisible circle of power around the needle. To actually see this magnetic field, wedge a horseshoe magnet between some books, with the poles facing upward. Balance a card or a piece of stiff paper on top of the magnet, and sprinkle iron filings on the card. Gently tap the card or paper and the filings will arrange themselves in circular forms with a pattern of lines running from pole to pole.



Iron filings scattered on an index card or stiff paper and held over a horseshoe magnet will arrange themselves like this. The lines are called lines of magnetic force.



Iron filings can be purchased at a hobby store. Be careful not to breathe or swallow any of them.

Make an Electromagnet

Now you are ready to make an electromagnet, a magnet activated by the transfer of electricity.



Step 1—Coil a length of insulated wire at least 20 turns around a large metal bolt or nail. The more turns of wire around the bolt or nail, the stronger the magnet. Use electrician's tape as needed to hold the coils of wire in place.

Step 2—Strip insulation at wire connections before connecting the wire ends to the terminals of a 4.5-volt or 6-volt battery. The electric current will produce a magnetic field, as you know from your experiment with the compass and the cardboard tube. The bolt or nail, now called the *core*, will become an electromagnet.

Test your electromagnet by using it to pick up metallic paper clips or pins. Try it first with the wire ends connected to the battery, then disconnect the battery. See if the bolt or nail will still pick up paper clips or pins. **Warning:** Leaving both wire ends connected to the battery will drain the battery and the magnet will stop working.




The word *circuit* refers to the path an electric current travels, from the source of the power, such as a battery, through some device using electricity, such as a lightbulb, and back to the source. If the circuit is opened, or there is no path back to the power source, electrons will not transfer.

Current Electricity


Current electricity is electricity in motion—the current that runs through a wire and rings a bell or lights a light. What makes the current move? How fast does it travel? In what direction does it go?

Potential Difference

Every object charged with electricity has a certain potential or electromotive force. When two objects with different potentials are connected with a wire, electrons move from where there are many to where there are few. This is how the transfer of electrons takes place. This potential difference between electromotive forces causes the electrons to travel along the wire attempting to equalize the two potentials until the circuit is opened.

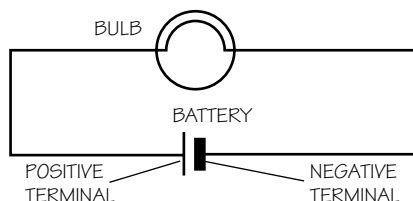

A simple circuit



An incomplete circuit


Electric Batteries

A potential difference exists in electric batteries. In a dry-type battery, like those used in flashlights, the battery's outer edge, or "can," is usually made of zinc, which is negatively charged. A carbon rod in the middle of the battery is positively charged. If you connect the zinc to the carbon with wiring attached to the battery terminals and a device such as a lamp that will use the transfer of current, then the electrons in the zinc will move through the wire and lightbulb into the carbon rod, thus converting chemical energy into electrical energy.

Dry Batteries

The most common dry-cell batteries are either lithium, alkaline, or nicad. Common battery sizes include AA, AAA, C, D, and 9V. These batteries can be either non-rechargeable or rechargeable. Dry cells can be stored for up to a decade before being used if stored in the proper conditions. Dry-cell batteries are portable and are used in a wide arrange of electronic devices including remote controls, flashlights, toys, portable electronic devices, cellphones, PC's, and even safety devices like smoke detectors.

Designed for on-and-off use, dry batteries wear down quickly if they are used continuously. Some specially designed batteries can be recharged by passing an electric current through the cells. Not all dry batteries can be recharged, though. A fire or explosion could occur if you attempt to recharge the wrong type of battery.

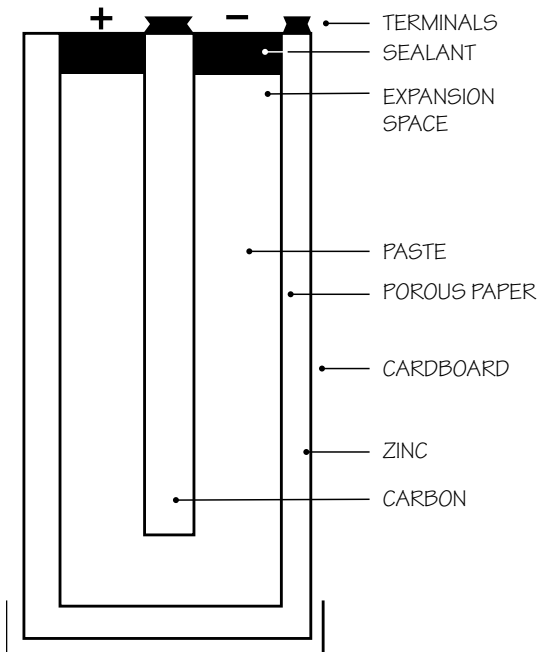

A dry cell is designed for on-and-off use.

Wet Batteries

Wet-storage cells, such as a car battery, should not be used too long without being recharged. If a car radio or headlights are left on all night, you may find the battery dead the next morning. The voltage and the water supply in unsealed wet batteries should be checked regularly and the area around the terminals kept clean. Most modern car batteries are sealed and require no maintenance, but true wet batteries can indeed dry out. Top them off to the fill line with distilled water.

A new type of sealed battery is the gelled electrolyte or “gel cell” battery, which provides a lot of current for its size, is easy to recharge, and is relatively inexpensive. Gel cells are found most often in emergency lighting systems in schools and stores.



Useful Electricity

Often, electricity is useful to people when it makes up a circuit. An electric circuit contains:

1. a **source** of electric energy, like a battery or a generating plant,
2. a **load**, where the electricity is converted to a useful form of energy like a lamp, a motor, or a heater, and
3. a pair of **wires** in a cable (home) or overhead/underground wires (transmission/distribution systems), to carry the electric energy from the source to the load.

This useful electricity circulates through the cable in the circuits located in homes, in opposite directions, where each of the two wires are insulated from each other with either plastic or rubber coating over copper wire.



Common Electrical Terms

To work with electricity, you need to know some common terms for using and measuring it. Several important terms are defined below.

alternating current. Current that regularly reverses direction, traveling first in one direction and then in the opposite direction. Power companies generate alternating current to make it easier to transmit electricity over long distances. Abbreviated *AC*.

ammeter. An instrument for measuring current in amperes.

ampere. A unit measuring the strength of an electrical current, based on the number of electrons transferring past a given point per second. Many elements of a wiring system are rated in amperes for the greatest amount of current they can safely carry. The ampere, abbreviated *amp*, is named for French physicist André-Marie Ampère.

circuit. A loop-shaped path through which electric current travels from the source through some device using electricity, such as a lightbulb, and back to the source.

circuit breaker. A safety switch installed in a circuit to break the transfer of electricity when the current exceeds a set amount. Circuit breakers can be reset once “tripped.” *See also* fuse.

conductor. A substance or device through which electricity passes. Most metals are good conductors of electricity—that is, they allow electricity to travel through them with little resistance. Gold and silver are the best conductors of electricity but are too expensive for general use. Copper, which is relatively cheap and plentiful, is used most often, especially in transmission lines that carry electricity from power plants to homes, schools, and businesses. Devices that run on electricity have copper or aluminum wiring. Aluminum is not as good a

conductor as copper, but because it is cheaper and lighter, it is also frequently used.

current. The transfer of electricity in one direction.

cycle. One complete reversal of alternating current; a forward current and backward current. Ordinary household current experiences 60 cycles per second (60 hertz).

direct current. An electric current of constant direction—that is, the transfer of electrons goes only in one direction. Abbreviated *DC*.

fuse. A safety device installed in a circuit to prevent an overload. Designed to melt or “blow” when current exceeds a set amount, it opens the circuit and stops the transfer of electricity. Fuses cannot be reused once blown. *See also* circuit breaker.

galvanometer. A device that detects and determines the strength of electrical currents.



ground. To connect any part of an electrical wiring system to the ground or to another conducting body, such as a metal water pipe or a metal rod driven into the earth.

grounding wire. Conductor that grounds a metal component but does not carry current during normal operation. A ground wire ensures that an appliance surface is free of electrical charge to prevent electric shock.

hertz. A unit of frequency equal to one cycle per second.

Abbreviated *Hz*.

hot wire. Ungrounded conductor carrying electrical current.

Usually identified by black or red insulation.

insulation. Covering of nonconducting material used on wires.

insulator. A material that does not conduct electricity, such as rubber or plastic.



kilowatt. Unit of electrical power equal to 1,000 watts.

Abbreviated *kW*.

kilowatt-hour. Unit of energy used for metering and selling electricity. One kilowatt-hour equals 1,000 watts used for one hour (or any equivalent, such as 500 watts used for two hours).

Abbreviated *kWh*.

load. The part of an electrical circuit that uses the electric power. In a lighting circuit, the load is the lightbulb.

neutral wire. Grounded conductor that completes a circuit by providing a return path to the source. Always identified by either white or gray insulation.

ohm. A unit of measurement for electrical resistance to a current. It is named for German physicist Georg Simon Ohm (1787–1854), whose Ohm's law states that the pressure of one volt will cause a current of one ampere to flow through a resistance of one ohm ($\text{Voltage} = \text{Current} \times \text{Resistance}$). This simple formula shows the relationship between volts, amperes, and resistance in any electric circuit. Abbreviated Ω .



Too many cords are plugged into this outlet.

outlet. An electrical device that provides access to electrical power for plugging in appliances or equipment.

overload. Condition in which an electrical circuit carries more current than it can safely handle.

receptacle. The device that you plug electric cords into, sometimes called an outlet.

resistance. The opposition against the free transfer of electrons in a conductor. Measured in ohms.

resistor. A device designed to restrict the transfer of current in (or introduce resistance into) an electric circuit.

rheostat. A resistor built so that the current traveling through the circuit can be adjusted at will.

short circuit. A completed, low-resistance circuit that allows electrons to follow a shorter, unintended path back to the power source rather than follow the longer path that goes through the load. Occurs when bare wires touch each other; often results from worn insulation.

source. Point of supply, such as a home outlet, generator, or battery.

switch. Device to break the transfer of electricity. When the switch is on, the circuit is closed and current may travel through it. When the switch is off, the circuit is open and electricity cannot transfer.

volt. A unit of potential difference, or a unit of measurement of electrical pressure or force. Abbreviated V.

voltage. Pressure at which a circuit operates, expressed in volts. Voltage is like the pressure in a water pipe. For example, 120 volts have twice the pushing force of 60 volts.



voltmeter. An instrument for measuring the difference in electric potential (electrical pressure) between two points.

watt. Unit that measures electrical power at the point where it is used in a circuit. One watt of power equals one volt of pressure times one ampere of current. Many electrical devices are rated in watts according to the power they consume.

Abbreviated W.



Current in Motion

Electricity is like an army division. Sitting still, it accomplishes nothing. To get work done, the division must start moving. Electricity marching along a wire is a valuable servant. We can generate it, send it over wires for great distances, and control it.

Alternating and Direct Current

There are two kinds of electric current—*direct current (DC)* and *alternating current (AC)*. Direct current is like a one-way street—the electrons go in only one direction. Turn on a flashlight and direct current travels. Car batteries also produce direct current.

In alternating current, the transfer of electrons starts from zero and builds to a peak in the positive direction, then subsides back down to zero. Then the transfer of electrons reverses, building to a negative peak and subsiding back to zero. In this way, electrons alternately travel in positive and negative directions, continuously repeating until the circuit is opened.


Large generators in power plants commonly produce alternating current for use in homes and factories. Most household and industrial power circuits in the United States have alternating currents with a frequency of 60 cycles per second, or 60 *hertz* (Hz). This means that the current alternates back and forth, making a round-trip, or *cycle*, 60 times per second. To make 60 round-trips, the current changes direction 120 times. Power systems in some other countries operate on a frequency other than 60 Hz. Some appliances depend on the frequency of the alternating current and will not work properly in countries with different frequency electricity.

Using Alternating Current

Power companies prefer alternating current because it is readily produced by large generators, and it is easy to step its *voltage* up or down. By passing it through simple transformers, operators can easily raise or lower the voltage of alternating current.

Power line voltages are extremely dangerous. If you see a downed power line, *do not approach or touch it*. Contact local authorities and the local power company immediately.

Transformers do not affect the power; they merely raise or lower the voltage and current.

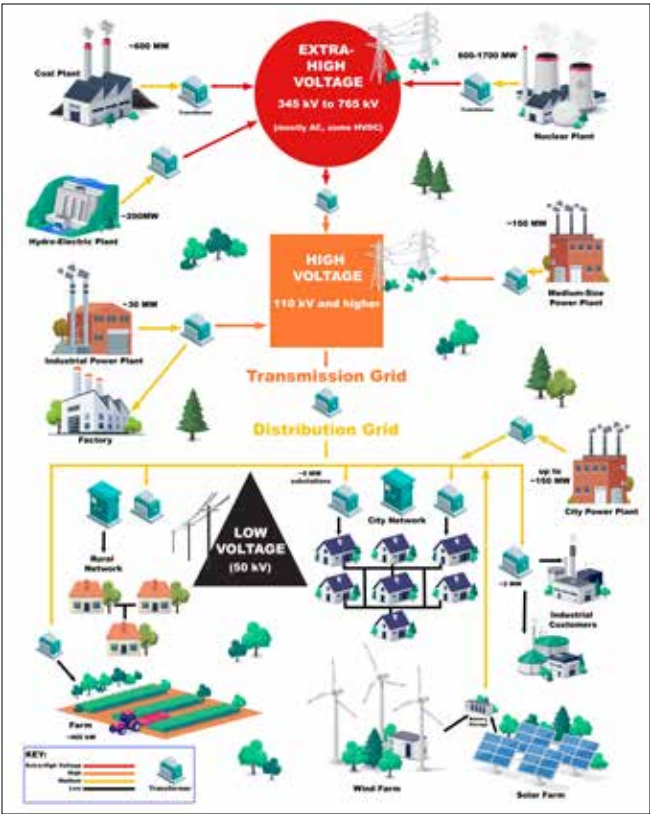

An electric grid is comprised of various sources that create electricity, which flows between the plants and transmission grid lines (EHV and HV). This electrical energy is transferred between the transmission and distribution grids to customers.

When stepped up to a higher voltage, alternating current is easy to transport over long wires. When it arrives at its destination, it is stepped down to moderate voltages. Alternating current readily operates lights, motors, and electrical appliances.

Generators in most electric power plants operate at 13,800 volts or higher. Voltage is passed through transformers that step up the voltage to 34,500 volts or higher. Transmission voltages typically are 115,000, 138,000, and 230,000 volts (called high voltage or HV), and 345,000, 500,000, and 765,000 volts (called extra high voltage or EHV).



If mishandled, the electrical current in your house can be dangerous. Do not tamper with power lines. The result could be a fuse blowout, tripped circuit breaker, fire, serious injury, or even death.

Transformers

You can raise or lower alternating current voltages by using a transformer. As you raise the voltage, you lower the current in a circuit. As you lower the voltage, you raise the current.

A transformer consists of a round or square iron core. Insulated wire wound around one side of the core is called the primary coil. Wire is also wound around the other side, but with a different number of turns. This is called the secondary coil. The voltage change is determined by the turns ratio of wires on the input side versus the output side of the transformer.

Alternating current is put through the primary coil, which induces another alternating current in the secondary coil. If the secondary coil has more turns than the primary coil, the voltage is stepped up. If the secondary coil has fewer turns than the primary coil, the voltage is stepped down.



Here's a definition of voltage classes provided by the American National Standards Institute.

Low voltage. A class of nominal system voltages less than 1,000 volts

Medium voltage. Voltages equal to or greater than 1,000 and less than 100,000 volts

High voltage. Voltages from 100,000 to 230,000 volts

Extra-high voltage. Voltages from 230,000 to less than 1,000,000 volts


Lightning rods are grounded. Can you explain why?

Long-Distance Electricity Transmission

Electricity often moves energy across long distances. Electricity sources such as power plants may be built in remote locations like dammed rivers, wind farms, or natural gas fields. The electricity will generally be used where large groups of people are, like cities.

Usually, electricity is moved over these distances using overhead power transmission lines. These transmission lines are tall metal towers from which aluminum conductors hang. The conductors are supported with glass or ceramic insulators.

A transformer basically consists of an iron core and two pieces of wire wound around it. To double the voltage, put twice as many windings on one side as on the other. To cut voltage in half, reverse the connections.

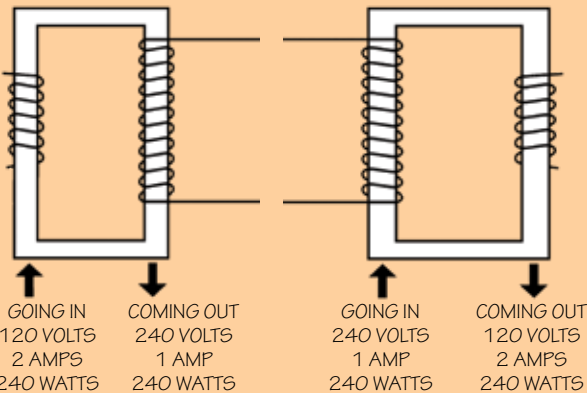

Check Your Appliances

Before connecting new appliances or motors, read the metal plate, known as the name plate, that shows what kind of current to use. Some motors and appliances may be wired for direct current or take a voltage higher or lower than the one available. Motors wired for one kind of current can be ruined by connecting them to a different type of current. However, some small motors are wired for both direct and alternating current and are so marked.



Power lines are tall and often take advantage of straight courses over many miles. The conductors are separated by many feet, because the potential difference, or voltage, is hundreds of thousands of volts.

The high voltage is used because it allows the corresponding current flowing in the conductors to be correspondingly low. In a transmission line, if the voltage is doubled, the current can be halved. This corresponding reduction in current allows the conductors to be thinner, lighter in weight, and cheaper. You can think of “high voltage” transmission lines as actually being “low-current” transmission lines.

Using Direct Current

While most current produced by large generators is alternating current, direct current can be produced for special needs. Alternating current can be changed to direct current by putting it through a rectifier. You probably have noticed that many small appliances and electronic devices have little black boxes that plug into wall sockets. The black boxes contain voltage transformers and, usually, rectifiers for changing house current (AC) to direct current (DC).

Cars use direct current, as do radios and television sets. Radios and TVs have diodes that act as rectifiers to change the alternating current in your house to the direct current

they require. Other uses for direct current include flashlights; electroplating; and charging batteries, cellphones, remotes, and laptops.

Insulators, Conductors, and Grounds

You know that *conductors* are materials that allow electricity to travel easily through them. *Insulators* are substances like glass, porcelain, plastic, and rubber that have high *resistance* and do not carry ordinary current. You have seen rubber or plastic insulation on wires attached to electronic devices and household appliances. Porcelain and polymer insulators are used on high-tension wires to keep the current from getting out of line or running into the ground.

To *ground* an electrical system means to provide an electrical path to the earth. Grounding assures that all metal parts of a circuit that you might touch stay at zero voltage because they are connected directly to the earth. In a car, the metal frame is the ground. Wires connected to it are considered grounded. The outer parts of the spark plugs are grounded to the engine. One pole of a car battery is grounded to the frame. High-tension wires have elaborate grounding systems in case lightning strikes them, which often happens.

It is crucial to realize that electricity will travel in conductors other than wires. It can travel through any conducting body—including a human body like your own. Make sure electricity does not use you as a conductor on its way to the ground. Water is a good conductor of electricity, so never turn on a light, a radio, or an appliance such as a hair dryer while standing in water—not even on a damp floor.



NEVER work on any live electrical circuit, fixture, or appliance. The shock could kill you.

Electric Motors

Generators and motors are devices that demonstrate the changing of energy between mechanical and electrical. Generators, like portable gasoline generators, take mechanical motion and transfer it to electrical energy, while motors convert electrical input to mechanical motion like turning a fan.

How an Electric Motor Works

A simple electric motor is little more than a spinning magnet. From your earlier work with magnets, you will remember that a movable magnet, such as a magnet on a string, swings around because its north pole is repelled and its south pole is attracted by the north pole of a nearby fixed magnet. It will stop turning when its south pole is nearest the north pole of the fixed magnet.

Now, suppose that just as the south pole of the movable magnet nears the north pole of the fixed magnet, we could somehow reverse its magnetic poles. Then it would keep moving for another half turn. If we could change its poles every half turn, the moving magnet would spin around and around.

We cannot reverse the magnet's poles, but we can achieve the same results. In place of a movable bar magnet, we can use a coil of wire wrapped around a core—an electromagnet—that spins. Like a bar magnet, it has north and south poles, but its poles can be instantly changed by reversing the current in the wire. Every time the circuit is opened and closed (once every half turn), the current reverses its direction. This is done automatically as the coil of wire spins around.

Fields, Armatures, and Commutators

Substitute another electromagnet for the fixed bar magnet, shaped to fit around the spinning coil, and you have a simple direct-current motor. The fixed electromagnet is called the field. The spinning electromagnet is called the armature. The arrangement for opening and closing the circuit is the commutator.

Make a Motor


You can build a motor by following these steps.

Materials Needed


- ☐ Screwdriver
- ☐ Wood base (about 12-by-4-by-1/2 inches)
- ☐ Four small screws
- ☐ Two metal L brackets (about 1 1/2-by-1 1/2-by-1/2 inches)
- ☐ Hammer and nail
- ☐ Piece of cork (3 to 4 inches long)
- ☐ Two pieces of thin insulated copper wire (bell wire)
- ☐ Sturdy, thin wooden or plastic dowel (about 10 inches long)
- ☐ Electrical tape
- ☐ Battery (C, 6V, or 9V)
- ☐ Rubber band
- ☐ Four to six small stick magnets
- ☐ Wire stripper

INSTRUCTIONS


Step 1—With a screwdriver, attach the L brackets to the wood base. Be sure the brackets are spaced far apart enough to allow room for the dowel to fit through the two holes at the top, and for the cork-dowel assembly to spin freely. About 1 inch of the dowel should reach past each support.

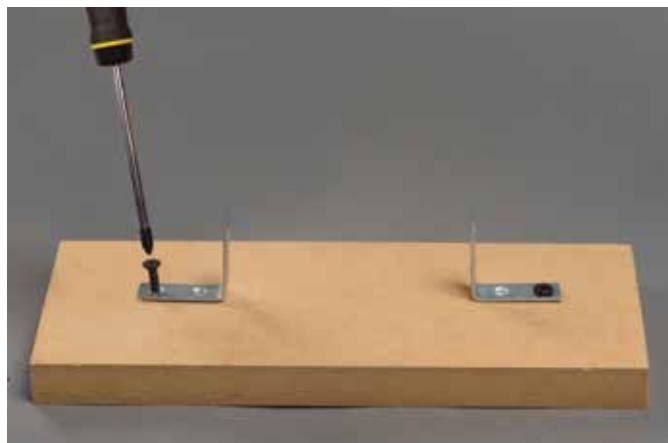

Step 2—Use the hammer and nail to punch a hole in the cork crosswise, as shown. Be sure the hole is large enough for the dowel and wire to pass through. With the cork in place, the dowel must be clear of the wood base and be able to turn freely in its support.

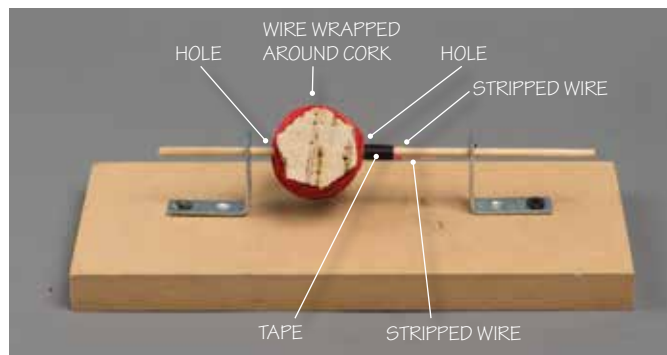

Step 3—Cut a piece of the insulated wire about 60 inches long, and wrap it around the cork about 15 to 20 times. Do not cover the holes in the cork or cut the wire—use one continuous length of wire. (The more wraps there are, the “stronger” the motor will be.) Leave several inches for leads on each end of the wire, and pass both ends through the hole in the cork.

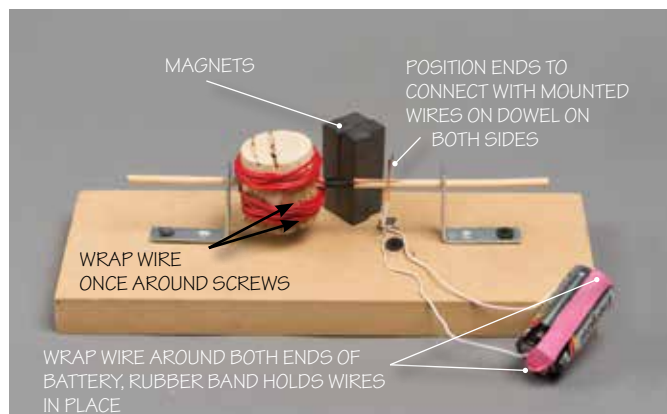


Keep extra
fuses handy.



Step 4—Using the wire stripper, remove about a half-inch of insulation from both ends of the wire. Insert the dowel in the cork. Tape the leads of the wire to opposite sides of the dowel, as shown. Do not let the stripped ends touch each other or cover them with tape.

Step 5—Screw two more screws into the wood base, as shown, but leave enough space between the screw and base to wrap wire around it once. Cut a piece of wire about 12 inches long. Remove about a half-inch of insulation from both ends of the wire. Wrap the wire across the top and bottom of a C battery, as shown, and secure in place using a rubber band. Then wrap each end of the wire once around the screws, and position the ends against the dowel, on opposite sides, so that the ends connect with the bare wire mounted on the dowel.

Step 6—Position the magnets as shown, close to the connections. Give the dowel a spin with your fingers. The motor should spin on its own. If it doesn't work, you may need to move the magnets slightly back and forth to find the "sweet" spot. Then try again, moving the magnets slightly back and forth, up and down, until the motor starts spinning.

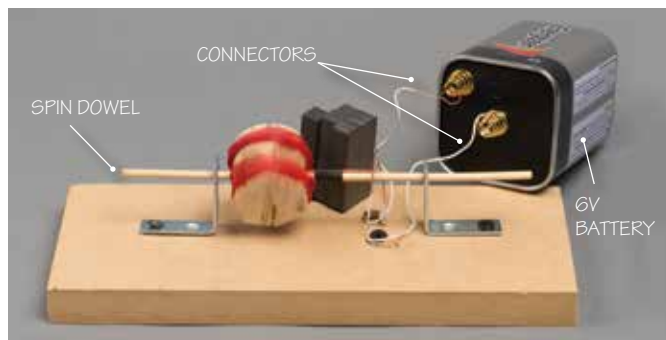

If you are using a 6V battery, connect the wires to the terminals, as shown here. The same concept applies for a 9V battery, but you will need to use a rubber band to secure the wire to the battery for a good connection.

Rheostat

A *rheostat* is a simple device used to control the electrical current in a circuit by inserting a length of high-resistance wire or other resistive material. The resistance of a rheostat is measured in *ohms* and determined by the size and length of the resistive wire.

Rheostats are used as volume controls in radios and television sets. They can also be used for temperature regulation in heaters and speed regulation in motors.

Make a Rheostat

You can make your own rheostat by following these instructions.

It is important to remember three rules about resistance:

- A thin wire offers more resistance than a thick one. Just as it is harder to force water through a small pipe than through a big pipe, it is more difficult for electricity to travel through a small wire than a larger one.
- A long wire offers more resistance than a short one, just as a long pipe slows the flow of water.
- Electricity tends to seek the path of least resistance.

When a fuse blows or a circuit breaker opens a line because of excessive current, you must first correct the cause of the problem. Then replace the fuse or reset the circuit breaker.

Materials Needed

- ☐ Flashlight battery
- ☐ Flashlight bulb
- ☐ Full length of pencil lead from a mechanical pencil
- ☐ Thin copper wire
- ☐ Transparent tape

Pencil lead makes a good rheostat because it is not a good conductor of electricity. The greater the distance between the battery and the bulb, the weaker the current becomes. A rheostat is a variable *resistor* used to control current.

INSTRUCTIONS

Step 1—Attach the wire to the top of the battery.



Step 2—Twist the other end of the wire around the metal side of the lightbulb.



Step 3—Holding the lightbulb by its glass end, touch the metal bottom of the bulb to the lead close to the battery as shown. The bulb will burn brightly.



Step 4—Gradually slide the bulb down the length of the lead. The bulb will slowly grow dimmer as it is moved away from the battery.



Fuses and Circuit Breakers

Electric current comes into your home on overhead or underground wires.

From your electrical meter, heavy, well-insulated wires run to a main distribution center or breaker box, where the main disconnect switch is located. If necessary, you can use that switch to shut off all electric current in your house.



The fuse box or circuit breaker panel is typically located in a utility room, in an electric room, in a mechanical room, or near the main power feed to the building. Fuses and circuit breakers act as guards: They prevent currents that are too strong from traveling into your home's branch circuits. If the transfer of electricity becomes greater than a fuse is designed to handle, the metal element inside the fuse melts and the fuse blows, or burns out. A circuit breaker automatically opens and "trips" the circuit.



Every time you switch on another light or appliance, more current travels through that branch circuit. The wire is heavy enough to carry amperes for normal use. If there are too many amperes, the wires may get hot and start a fire unless a fuse or circuit breaker protects the line.

If a fuse is designed to carry up to 15 amperes, for example, and you try to consume 25 amperes from that line, the fuse blows, the lights go out, and you know you have overloaded the circuit. First, correct the problem so you will not overload the circuit again. If you have too many appliances plugged into one outlet or one circuit, unplug them. Toasters, coffee makers, irons, and heaters can use a lot of current. They frequently are the culprits.

**Dos**

- Employ professional, licensed electricians for major electrical work.
- Promptly replace worn cords and defective plugs.
- Open the main disconnect before replacing fuses.
- Keep electrical cords where people won't trip over them.

Don'ts

- Don't plug in too many appliances or devices into one *outlet* or one circuit. The *overload* may blow a fuse, trip a circuit breaker, or start a fire.
- Don't pull out cords by the wire. Take firm hold of the plug instead.
- Never touch electrical devices while in the tub or while touching faucets, water pipes, or radiators.
- Don't let Christmas tree lights touch the needles of the tree.
- Never leave Christmas tree lights burning if you're not home.
- Never work on any live electrical circuit, fixture, or appliance.
- Don't replace a blown fuse with one that has a higher ampere rating.
- Never stand on a damp floor when replacing fuses or handling electrical devices.
- Don't operate fans or heaters where small children can reach them, and don't leave these appliances running unattended.

Short Circuits

One common cause for a blown fuse or tripped circuit breaker is a defective or frayed cord. Insulation wears off and the bare wires *short-circuit*. A flash of light and a smell of burning insulation indicate a short circuit. In a short circuit, electrons can follow a shorter, unintended path back to the power source rather than the longer path that goes through the appliance or other device using electricity. Since the current suddenly encounters lower resistance, more current transfers, and that blows a fuse or trips the circuit breaker.

Some circuit breakers used in homes are the push-push type; others have a handle that must be pushed to the off position before the breaker can be reset to the on position. Follow the instructions on your home's circuit breaker panel to properly reset whatever type you have.

Fuse Boxes

Fuse boxes have not been used in home or business construction for many years. However, you might encounter a fuse box in an older building. In a fuse box, there will be several fuses. Before you replace one, open the main disconnect for safety. The blown fuse probably will look black or show a gap. Unscrew the burned one and replace it. If you can't tell which fuse is blown, check each one. Each fuse is marked to show how many amperes it will carry. Never use a fuse of higher amperage than the one you take out—it could start a fire.



Damp floors can be a shock hazard. If a room in your home has a damp floor, power should be disconnected and the problem fixed before returning electric power to the room.

Series and Parallel Circuits

In a series circuit, electric current travels along a single path, going through each component or device. If one component is removed or fails (as when a series-wired Christmas tree bulb burns out), the circuit is broken and electric current stops.

In a parallel circuit, each component or device is connected to the power source on its own branch of the main circuit. Even

if one bulb in a parallel circuit burns out or is removed, the other bulbs continue to work because each has its own complete circuit. The wiring in a house is arranged on parallel circuits. If you switch off one device, the others still work.




Switches

A single-pole, single-throw switch is commonly used to turn on electric lights and many other devices. It also is one of the easiest electrical items you can make for a home experiment. It is simply a strip of metal that swings, making contact with a round-headed screw. A metal washer at the fixed end of the switch is suggested.

Electric Bell

For part of requirement 5, you will need to draw a simple electric bell to show how it works. Look at the drawing of the electric bell on the following page.

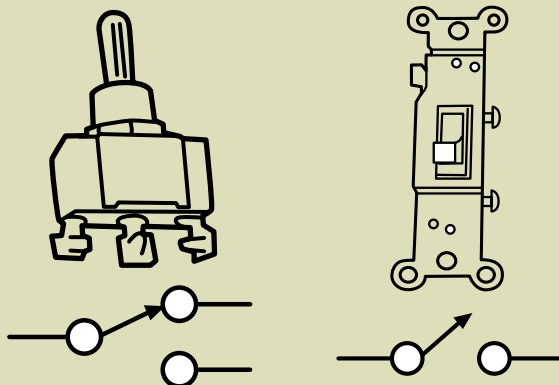


Stairways often have lights that can be controlled by switches at both the top and bottom of the stairs. This requires a single-pole, double-throw—or three-way—switch in each position.

First, follow the path the current takes. When you push the button, the current goes through terminal A to the electromagnet F. From there it goes to a moving contact, C, then to contact post D, and out terminal E.

How does the current cause the bell to ring? As you push the button, the electromagnet F attracts a small piece of iron (the armature), B. Attached to the armature are contact C and a hammer, H. The hammer hits the gong. As the armature is pulled to the magnet, it pulls the contact away from post D and the current stops—the circuit is broken. Thus, the electromagnet loses its power and the spring G snaps the armature and contact C back to post D. As contact C touches the post, the current starts transferring again and the entire process is repeated. This will happen several hundred times per minute, creating the sound of a ringing bell or vibrating gong.

A *watt* is a unit of power that measures electrical power flowing through a circuit. It was named for James Watt (1736–1819), a Scottish inventor who perfected the steam engine.

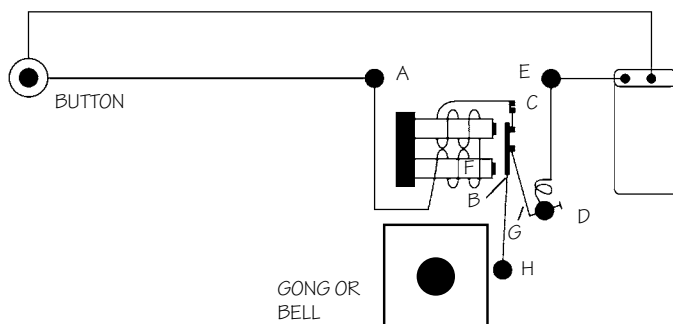

An electric vibrating bell. A and E are terminals. B is the iron armature, C the moving contact, D the contact post, F the electromagnet, G the return spring, and H the hammer.



Electrical Safety Inspection

For requirement 2, you will need to complete an electrical safety inspection of your home. Here are some items you can check in your home today to ensure electrical safety. These tips come from the Electrical Safety Foundation International and can be found at esfi.org.

Make an electrical safety checklist and walk through each room of your house, checking on each aspect of electrical safety. You can go over your list with your counselor later and discuss what you found.

Outlets. Check for outlets that have loose-fitting plugs, which can overheat and lead to fire. Have an adult replace any missing or broken wall plates. Make sure there are safety covers over unused outlets that are accessible to children.

Cords. Make sure cords are in good condition and not frayed or cracked. Make sure they are placed out of traffic areas where people can trip over them or small children can reach them. Cords should never be nailed or stapled to the wall, baseboard, or another object. Do not place cords under carpets or rugs or put furniture on top of them.



Extension Cords. Check to see that cords are not overloaded. Extension cords should be used on a temporary basis; they are not intended as permanent household wiring. Make sure extension cords have safety closures to help prevent small children from electrical burns on their mouths and other injuries.

When a pointer on any of the meter dials is between two figures, always note the smaller number. If you are not sure a pointer has passed a figure, see if the pointer to the right has passed zero.



Underwriters Laboratories Inc. (UL)

is an independent, not-for-profit product safety testing and certification organization. A UL label or stamp (*above*) means that the product meets nationally recognized safety standards. Look for this label when purchasing any electrical products.

Plugs. Make sure your plugs fit your outlets. Never remove the ground pin (the third prong) or try to make a three-prong plug fit into a two-conductor outlet. This could lead to an electrical fire. Never force a plug into an outlet if it does not fit. Plugs should fit securely into outlets. Avoid overloading outlets with too many appliances.

Lightbulbs. Check the wattage of all lightbulbs in light fixtures to make sure they are the correct wattage for the rating of the fixture and any interconnecting wires. Replace bulbs that have a higher wattage than recommended. If you do not know the correct size, check with the manufacturer of the device. Make sure bulbs are screwed in securely; loose bulbs can overheat.



Ground Fault Circuit Interrupters (GFCIs). GFCIs can help prevent electrocution. They should be used in any area where water and electricity may come into contact. When a GFCI senses current leakage, it assumes a ground fault has occurred. It then interrupts power fast enough to reduce the chance of serious injury from electrical shock. Test GFCIs frequently according to the manufacturer's instructions and after major electrical storms to make sure they work properly.

Circuit Breakers/Fuses. Circuit breakers and fuses should have the correct size current rating for the circuit wiring, intended purpose, and the appliances/devices connected to it. The correct rating for each appliance or device is usually provided on its

nameplate. For example, a television has a nameplate on the back with its volts, amps and/or watts ratings; or a light bulb has similar data stamped or embossed on it. If you do not know the correct rating, have an electrician identify and label the rating to be used. Always replace a fuse or circuit breaker with one of the same rating. Make sure everyone in your family knows where the main breaker is located and how to shut off power to your entire house in case of emergency (via the main circuit breaker).

Plug-In Appliances. Check to make sure plug-in appliances such as hair dryers are not left plugged in where they can come into contact with water. If a plug-in appliance falls into water, NEVER reach in to pull it out, even if it is turned off. First, turn off the power source at the fuse box or breaker panel, and then unplug the appliance. If you have an appliance that has gotten wet, do not use it until it has been checked by a qualified repair person.



Appliances. If any appliance repeatedly blows a fuse or trips a circuit breaker, or if it has given you an electric shock, unplug it and have it repaired or replaced.

Entertainment/Computer Equipment. Check to see that the equipment is in good condition and working properly. Look for cracks or damage in wiring, plugs, and connectors. Always use a surge protector bearing the seal of a nationally recognized certification agency to protect your electronic devices from unexpected overvoltage surges from the utility feeder or lightning strikes that could otherwise cause damage.

Outdoor Safety. Electric lawn mowers and electric power tools with electric cords should not be used in rain, on wet grass, or in wet conditions. Inspect power tools and electric lawn mowers before each use for frayed power cords, broken plugs, and cracked or broken housings. If a tool is damaged, stop using it immediately. Repair or replace it. Always use an extension cord marked for outdoor use and rated for the power needs of your tools. Unplug all portable power tools when not in use. When using ladders, stay away from overhead wires and power lines. Making contact with power lines can cause serious injury or death.

Lightning. During electrical storms, do not use appliances such as hair dryers, toasters, radios, or telephones, except in an emergency. Do not take a bath or shower. Keep batteries on hand for flashlights in case of power outages. Use surge protectors on electronic devices, appliances, telephones, faxes, and modems. The best protection is to unplug electrical equipment during an electrical storm.

Space Heaters. Space heaters are meant to supply supplemental heat. Keep space heaters at least 3 feet away from combustible materials such as bedding, clothing, draperies, furniture, or rugs. Do not use them in rooms where children are unsupervised. Turn off and unplug space heaters when they are not in use. Do not use space heaters with extension cords. Plug the heater directly into an outlet of a relatively unburdened circuit.

Halogen Floor Lamps. Halogen floor lamps operate at much higher temperatures than standard incandescent lightbulbs. Never place a halogen floor lamp where it can come into contact with drapes, clothing, or other combustible materials. Be sure to turn the lamp off when you leave the room and never use these types of lamps in children's rooms or playrooms. Consider cooler fluorescent floor lamps.

Electrical Floor Plan of a Room

For requirement 7, you will need to draw a simple floor plan of a room in your house with lights, switches, and electrical outlets penciled in.



First, make a drawing that shows the outlines of a room in your house. Then use the electrical wiring symbols to draw in the overhead and wall lights and to show where electric switches and electrical outlets are located.

Next, ask a parent or guardian to go to the main breaker box and turn off the circuit that supplies power to the room you have chosen. Turn on the lights in the room before the adult flips off the circuit breaker. If there is more than one circuit breaker that corresponds to the room, note which breaker supplies power to what outlets, lights, and switches by checking them while the power is off.

To the side of your room drawing, make a box and highlight the circuit breakers that supply power to the room. Briefly note which breaker supplies power to the various electrical devices in the room. Note the size fuse or circuit breaker with which the room operates. Ask a parent or guardian to check the fuse/circuit breaker size at the breaker box.

How to Read an Electric Meter

A watt-hour is a unit of energy. Electric companies charge their customers on the basis of *kilowatt-hours (kWh)* used. Kilo is the Greek word for one thousand. Thus, a kilowatt-hour is 1,000 watt-hours. One kilowatt-hour equals 1,000 watts used for one hour (or any equivalent, such as 500 watts used for two hours). The electric meter at your house measures kilowatt-

Electrical Wiring Symbols



Ceiling outlet



Single-pole switch



Floor outlet



Double-pole switch



Two-wire cable or raceway



Three-way switch



Three-wire cable or raceway



Galvanometer



Four-wire cable or raceway



Resistor



Push button



Single-pole,
single-throw switch



Buzzer



One-cell battery



Bell



Multicell battery



Chime (also **CH**)



Ammeter



Motor



Bulb



Junction box



Bulb in bulb holder



Ground connection



Voltmeter



hours; an electric bill shows the cost of the number of kilowatt-hours used in a given period of time.

As part of requirement 8, you must learn how to read an electric meter. Locate the electric meter at your home or apartment. It will be either the digital display type or a traditional dial meter.

In the past, electric meters were dial meters; see the next page to learn how to read them. Most now are digital. Digital meters are read as a direct numerical measurement. To find out how many kilowatt-hours you used at your house in one month, subtract last month's bill-end date reading, which can be found on your last electric bill, from this month's bill-end date reading directly from the digital meter's display.


Determining the Cost of Electricity

To figure out how much your electricity bill will be, you must know how much your electric company charges per kilowatt-hour. You can find this out by looking at your family's electric bills. If the bill does not show a price per kilowatt-hour, you can get a close estimate by dividing the amount of the bill by the kilowatt-hours used.



Reading a Dial Meter

With the dial (analog) meter, beginning with the left-hand dial in the illustration below, notice that the last figure passed by the pointer is 1. On the next dial, the pointer has passed 7. (Some of the dials read clockwise, others read counterclockwise. The pointer on this dial goes counterclockwise.) The third dial has passed 5. On the fourth dial, the pointer is between 9 and 0. Consider 9 in this case to be smaller than 0 because the 0 is really a 10. Also, you always write down the number the pointer has just passed, not the number it is moving toward. The final pointer is exactly on 2. The meter reading is 17592.

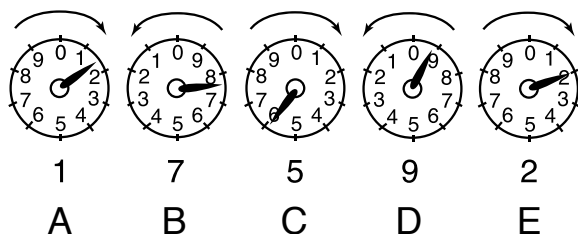

To find out how many kilowatt-hours you used at your house in one month, subtract last month's reading, which can be found on your last electric bill, from this month's reading. For example:

Dial	A	B	C	D	E
Present reading	1	7	5	9	2
Last month's reading	1	6	6	0	2
Kilowatt-hours used	$\begin{array}{r} 17592 \\ - 16602 \\ \hline 990 \end{array}$				

To figure out your electric consumption during any period of time, simply subtract the reading taken at the beginning of the period from the reading taken at the end of the period.

For example, an electric bill of \$124.32 divided by 1,110 kWh works out to \$0.112 (slightly more than 11 cents) per kilowatt-hour. If your electric company charges 11 cents per kilowatt-hour, the bill for 990 kWh (in the earlier meter-reading example) would be $990 \times 0.11 = \$108.90$.

Note that the dials give readings in multiples of 10. The dial farthest to the right shows kilowatt-hours in single digits, the next dial in tens, the next dial in hundreds, then thousands, and the leftmost dial in ten thousands.

As you saw earlier, the hands on the dials of a meter turn either clockwise or counterclockwise. The pointer on the dial to the right must make a complete revolution, that is, reach zero, before the pointer on the next dial will move one space, and so on.

Conserve Energy, Reduce, Use

Consider how your family could conserve energy and reduce your electric bill, then share your thoughts with your counselor. The five keys to good energy management are:

1. Know your electric utility rates.
2. Know how much energy you are using.
3. Know where you are using the energy.
4. Know when you are using the energy.
5. Implement simple energy-management techniques.

Here are some ideas.

Turn off lights and electronic equipment after use. Set the air conditioner at 78 degrees during summer months and the furnace at 68 degrees in winter. If you are too cold or too warm, layer your clothing up or down accordingly. Turn off the heat and open windows on days when the temperature is over 65 degrees. On cool summer days, turn off the air conditioner.





Clean or replace heating and air-conditioning filters at least once a month. Filters clogged with dust and air pollutants make air-conditioning and heating your home less efficient.

Install low-voltage outside lights. Install light-emitting diode (LED) lights. LED lighting is a more efficient, cooler, and cost-efficient form of lights that will greatly reduce lighting bills.

Do full loads of laundry. You can conserve water and electricity and lower your electric costs by washing only full loads of laundry.

Grill food outside. Using an outdoor grill in good weather will minimize use of the electric oven and stovetop.

Electric Utility System

Refer to the Electric Utility System Map (see Electric Grid, page 32) containing the generation stations (fuel types), transmission systems (EHV / HV), which are the sources of electricity to a localized area, called the distribution system. The system feeds electricity homes, businesses, small factories, farms, and more. The system map also includes things such as the smart grid, distributed systems, etc. on the electric distribution system.

The smart grid is the 20th-century electrical grid enhance with smart meters. It uses two-way communications and distributed intelligent devices that work with digital technologies, sensors, and software to better match the supply and demand of electricity in real time. Two-way flows of electricity and information could improve the electrical delivery network while maintaining stability and reliability of the grid.

Virtual power plants (VPP) are collections of controllable distributed energy resources (DERs) located at the end-user's location that provide electricity generation, storage, and demand flexibility at a small scale (sub-utility scale). These resources are usually connected to the lower-voltage distribution grid. Examples of DERs include (but aren't limited to) rooftop solar panels, battery storage units, smart appliances, electric vehicles (EV) chargers, and demand response programs.



Responding to Electrical Emergencies

Electrical outlets and wires pose the greatest danger to young children. Preschoolers love to insert hairpins, paper clips, and any number of other conductive objects into electrical sockets. Toddlers often explore electrical outlets and wires by mouthing them. Since water is an excellent conductor of electricity, there is a danger of severe facial burns.

When not in use, electrical outlets should have protective guards plugged into them or be hidden and hard to reach behind furniture.

Electric Shock

Electric shock is caused by electric current passing through a human body. The victim's breathing may stop and the person's body may appear stiff. The electric contact must be broken as quickly as possible.

If someone is in contact with a live circuit, **do not touch the person**. You can become "stuck" to the person and part of the electrical field. If the service panel is nearby, quickly shut off the house current by throwing the main disconnect switch. If it is a long way to the service panel, or you do not know where the main disconnect switch is, use a nonconducting object such as a wooden chair, wooden broom handle, rug, or rubber doormat to separate the person from the live wire. Never use a metal or wet object.



Under no circumstances should you ever touch a victim or an electric wire with your bare hands while the person is still in contact with the electrical source.

Keep in mind that both water and metals can conduct electricity. If you are trying to rescue a person touching a live wire, stand on something dry and nonconducting like a rubber mat or wooden stool.



If you can't separate the victim from the wire using something like a broom handle, make sure you are standing on a perfectly dry surface and use a dry towel, sheet, sweater, or other heavy cloth to encircle the wire where it is not wet or bare. Pull the wire from the victim. **Never directly touch the wire or the victim.** Don't touch grounded objects like pipes under a sink.

If you can't remove the wire, your final alternative is to use a cloth to pull the victim from the wire. Without touching the person, carefully loop a sweater or other piece of clothing around the victim, and grasping the ends of the clothing, pull the person away. You might have to pull some distance before breaking contact with the wire. Do not touch the victim directly until the victim and the wire are separated.

If the person is not breathing after the rescue, start artificial respiration immediately. Call 911 for medical assistance.



High-Voltage Power Lines

Rescuing a person in contact with a live power line outdoors is extremely dangerous and should not be attempted

by a Scout. Call 911 immediately and let the fire department and police handle that type of emergency. Also, do not get within 20 feet of someone who is being electrocuted by high-voltage electrical current until the power is turned off and a utility or safety worker declares the area safe.

Treating Burns

Unless there is immediate danger, do not move a victim of electrical injury. Do not apply ice, butter, ointments, medication, bandages, or cotton dressings to electrical burns. Do not touch burns, break blisters, or remove burned clothing. Electric shock causes burns inside the body, so immediately seek medical attention for the victim.

Once you and the victim are securely away from the electrical source, check the person's wrist and jugular vein in the neck for a pulse. If the victim is not breathing, start artificial respiration right away.



Life-Threatening Emergencies

The correct first aid given quickly can save a life. A person who has stopped breathing must receive rescue breathing within three to five minutes or brain damage will occur. People who may need lifesaving first aid include victims of lightning strikes. After calling for help, assess the situation to decide what you should do and in which order.

If opening the airway restores breathing, place the victim in a recovery position. Continue to monitor the person's breathing until help arrives.

Always use a breathing barrier when performing rescue breathing.

Find out if the person is conscious. Tap the person on the shoulder to see if there is a response. Ask, "Are you OK?" If there is no response, the person is unconscious. Call or send for medical help.

An easy way to recall the order of treatment in a life-threatening emergency is A-B-C-D: **A**irway, **B**reathing, **C**irculation, and **D**efibrillation.

A is for airway. The airway is the passage that allows air entering the mouth or nose to reach the lungs. Always protect the airway of any accident victim. If the person begins to vomit, turn the victim onto the side so that the vomit comes out of the mouth and is not aspirated (inhaled) into the lungs.

If a victim is unconscious, carefully place the person on their back, protecting the head and neck if you must roll the person over. Then, open the airway by pressing (or tilting) on the forehead with one hand and lifting the chin with the other to tilt back the head. This action will keep the tongue from blocking the person's airway.



B is for breathing. After opening the victim's airway, check to see if the person can breathe normally. Place your cheek in front of the victim's mouth (about 1 to 2 inches away). Look, listen, and feel for movement and breathing (signals of circulation, or "signs of life") for no more than 10 seconds. If the person is breathing effectively, you will feel and hear the airflow on your cheek and see and feel the chest rising and falling at regular intervals. *If there is no breathing or movement; give two rescue breaths, then begin cardiopulmonary resuscitation.*

Once you have opened the airway, check for movement and breathing for no more than 10 seconds. If the person still is not breathing, give two rescue breaths.

Step 1—Place a CPR breathing barrier over the victim's mouth. That may protect both of you from orally transmitted diseases.

Step 2—Give two rescue breaths. While maintaining the head-tilt, pinch the nostrils, seal your mouth over the victim's mouth and blow into it to fill the person's lungs. (For an infant, seal your mouth over both the mouth and nose, then breathe gently.) Each breath should last about 1 second. Watch to see if the chest clearly rises. Remove your mouth and then give another rescue breath.

Step 3—**For a child or an infant**, after two rescue breaths, check for a pulse for no more than 10 seconds.


If there is still no breathing, begin rescue breathing (1 breath about every 3 seconds) and recheck for breathing and pulse every 2 minutes as long as there is a pulse but no breathing. **For an adult**, after two rescue breaths, begin CPR immediately if the victim does not resume breathing.



If the victim revives, put the person in a recovery position and treat for shock. Monitor the person to make sure breathing does not stop again.

C is for circulation. Signals of circulation mean that the heart is still beating and circulating blood through the body. Normal breathing and movement are signals of life and that there is a heartbeat. In the case of young children (under age 12) and infants, feeling for a pulse for no more than 10 seconds can also be performed. *If there are no signals that the heart is beating, begin CPR immediately.*

Accidents or medical conditions that cause a person to stop breathing can also stop the heart. If the heart is not pumping and circulating blood through the body, the victim will not be breathing, moving, or making normal sounds. If you have delivered two rescue breaths and the victim does not begin

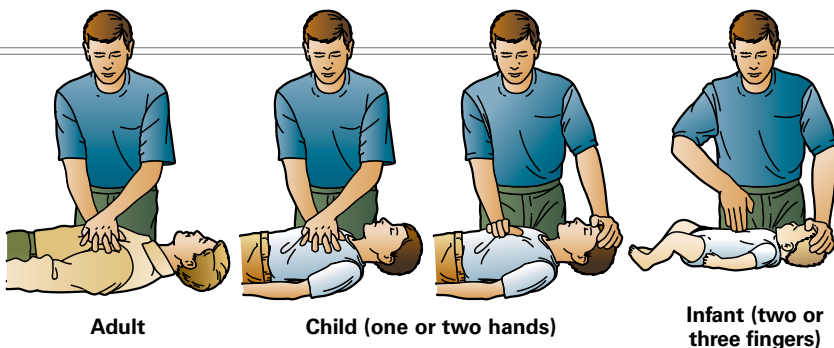

While the techniques for CPR are different for adults, children, and infants, the cycle of 30 chest compressions followed by two rescue breaths applies to everyone. To receive full and proper CPR training, contact your American Red Cross chapter or the American Heart Association. See the resources section in the back for more information.

to breathe, you should perform cardiopulmonary resuscitation, or CPR, immediately.

Learning CPR requires careful instruction from a certified teacher. Perhaps you can practice CPR at Scout meetings. The American Red Cross and American Heart Association offer classes, too. Your Scout leaders can help you find training to learn this lifesaving skill.

D is for defibrillation. The heart is made up of many muscle fibers that usually contract and relax in unison to pump blood. During a heart attack, those muscle fibers do not work together. A heart attack can lead to what is known as “cardiac arrest.” Another cause of cardiac arrest is an abnormal electrical heart rhythm, most commonly known as ventricular fibrillation.

A machine called a *defibrillator* can send an electrical shock through the heart to momentarily stop all electrical activity. This pause gives the heart enough time to try to restore an effective heartbeat (rhythm). A person whose heart has stopped functioning can be treated with this special device, if one is available. Ideally, this should happen within several minutes of the victim’s collapse.

Most ambulances, hospitals, and emergency care facilities are equipped with defibrillators for use by trained medical personnel. Because a defibrillator must be used quickly (within several minutes) to save a person’s life, a new type of defibrillator called an *automated external defibrillator (AED)* has been developed. Many first responders such as police officers and firefighters carry and are trained in the use of AEDs.

An AED is computerized. It can check a person’s heart rhythm and recognize a rhythm that requires a shock. It can also advise the rescuer when a shock is needed.

AEDs are very accurate and easy to use. With only a few hours of training, you can learn how to operate an AED safely and effectively.

Many public places such as airports and shopping malls now have installed AEDs in clearly marked, designated areas much the same way that fire extinguishers are made readily available for access in an emergency.

Recovery Position

Place a victim who is unconscious but who is breathing normally in a recovery position. Extend the person's lower arm in line with their body; support the head and neck as you grasp the victim's hip and shoulder, and roll the victim toward you so that the person is lying on the side. This will prevent the person from choking on saliva, blood (from a bitten tongue), or vomit, and will help keep the airway open. Continue to monitor the person's breathing until medical help arrives.

You may need to turn a person who has been in a recovery position for 30 minutes or longer to the opposite side to stimulate circulation. However, do not move a person with suspected spinal injury unless it is absolutely necessary.

Recovery position for a person who does not have a suspected spinal injury



Recovery position for a person who may have a spinal injury



Bathroom Injuries

In the case of an electrical injury in the bathroom, be especially careful. It is best to throw the main disconnect switch and call 911. There are many grounded objects in a bathroom. The floor is often wet, and it might be difficult to get the victim away from the wire in the small, enclosed space of a typical bathroom.

Electrical Fire

Electrical fires are different from other fires. Because water conducts electricity, you should never throw water on an electrical fire. Here is what Southern California Edison suggests you do in the event of electrical fire.

- Never use water on an electrical fire.
- Turn off the main power to the house.
- If the fire cannot be safely put out, leave the house immediately and take everyone with you.
- Call 911 from the nearest phone once you and your family are safely away from your home.
- There are different types or classes of fire extinguishers. Class C extinguishers are recommended for use on electrical fires due to the danger of electrical current conduction and possible electrocution with other types of extinguishers

Electrical Storm

The draw of an open wilderness is powerful, but so are lightning strikes that are possible during an electrical storm. If caught in



If the fire can be safely put out, tell an adult to use a proper chemical fire extinguisher.

the outdoors and there is no safe shelter nearby, avoid open fields; the tops of hills, ridges, and mountains; bodies of water; and the bases of tall, isolated trees and other tall objects, such as flagpoles. If you are in a forest, stay near a lower stand of trees. Avoid wet items, such as ropes, and metal objects, such as fences and poles. Be aware that tents offer *no* protection from lightning.



The best thing to do when a storm approaches is to seek shelter in a safe building or vehicle. A safe building is one that is fully enclosed with a roof, walls, and floor and has plumbing or wiring. A safe vehicle is one that is fully enclosed with a metal top.



Careers in Electricity

The electrical industry has several general areas with many types of careers available in each area. These areas include manufacturing, construction, merchandising, operating, servicing or maintaining, and engineering electrical parts, equipment, and systems. Training requirements vary in each area. Some positions require a college degree, while a degree from a vocational school is adequate for other careers. Some companies allow on-the-job training, but almost all require at least a high school diploma.



In **electricity manufacturing** (electrical generating stations, transmission, and distribution substation systems) positions are available in multiple different areas. Occupations include assemblers, that is, the people who help build electrical equipment and/or systems. A high school education is needed as well as mechanical aptitude.



Merchandising, or sales, is another field for those interested in electricity. Someone who has technical knowledge and enjoys talking with and meeting people could do well in electrical equipment or systems sales. Education can include a high school diploma or degrees from vocational schools or college.



Many types of electrical equipment are so specialized that they require trained **operators**. An operator might work with computers, cameras, satellite tracking devices, telecommunication systems, ship radios, or medical machines. In some cases, the operators must maintain and repair their own equipment. Education from a vocational school, a degree from a college or university, or training in the military usually is needed for these positions.

Because of the complexity of many electrical machines, **service and maintenance people** are always needed. Any electrical device can fail or malfunction from time to time, and people are needed to make quick and expert repairs.



Technicians can have a variety of positions. They might be required, among other things, to turn engineering ideas into hardware, repair equipment, or calibrate (adjust) test instruments. Most technicians have one or two years of technical training after high school. Some receive training in the military, and others go to a vocational school or junior college. Some receive on-the-job training or study at home by correspondence. Many occupations require ongoing training so that technicians remain current with changing technology.

A highly trained **electrical engineer** might design electrical equipment or large electrical systems. Electrical engineers usually have a bachelor's degree or higher in engineering. As with technicians, engineers must constantly update their education to keep up with new components and techniques.

Electricity Resources

Scouting Literature

Deck of First Aid; Chemistry, Electronics, Energy, Engineering, First Aid, Home Repairs, Inventing, Lifesaving, Nuclear Science, and Safety merit badge pamphlets

With your parent or guardian's permission, visit Scouting America's official retail site, **scoutshop.org**, for a complete list of merit badge pamphlets and other helpful Scouting materials and supplies.

Books

Asimov, Isaac. *The Kite That Won the Revolution*. Houghton Mifflin Company, 2000.

Bartholomew, Alan. *Electric Gadgets and Gizmos*. Kids Can Press, 1998.

Billings, Charlene W. *Superconductivity: From Discovery to Breakthrough*. Cobblehill Books; Dutton, 1991.

De Pinna, Simon. *Electricity Science Projects*. Raintree Steck Vaughn, 1998.

DiSpezio, Michael Anthony. *Awesome Experiments in Electricity and Magnetism*. Sterling, 2006.

Dixon, Malcolm, and Karen Smith. *Electricity*. Evans Brothers, 2005.

Epstein, Sam and Beryl. *The First Book of Electricity*, rev. ed. Franklin Watts, 1977.

Flaherty, Michael. *Electricity and Batteries* (Science Factory). Copper Beach Books, 2008.

Gibilisco, Stan. *Teach Yourself Electricity and Electronics*. McGraw-Hill, 2011.

Good, Keith. *Zap It! Exciting Electricity Activities*. Lerner Publications Co., 2003.

Matt, Stephen R. *Electricity and Basic Electronics*. The Goodheart-Willcox Co. Inc., 2012.

Meiani, Antonella. *Magnetism: Experimenting With Science*. Lerner Publications Co., 2003.

Morrison, Ralph. *Electricity: A Self-Teaching Guide*. John Wiley, 2003.

Parker, Steve. *Electricity and Magnetism*. Gareth Stevens Publishing, 2007.

Parker, Steve. *Eyewitness: Electricity*.
DK Publishing, 2005.

Parsons, Alexandra. *Make it Work!*
Electricity. World Book Inc., 1997.

Riley, Peter D. *Electricity* (Straightforward
Science). Franklin Watts, 1999.

Royston, Angela. *Using Electricity* (My
World of Science). Heinemann, 2008.

Wood, Robert W. *Electricity and
Magnetism FUNDamentals: FUNtastic
Science Activities for Kids*. Chelsea
House, 1998.

Wood, Robert W. *Physics for Kids: 49
Easy Experiments With Electricity
and Magnetism*. TAB Books, 1990.

Organizations and Websites **Boston Museum of Science**

Telephone: 617-723-2500
Theater of Electricity:
mos.org/live-presentations/lightning

Electrical Safety Foundation International (ESFI)

1300 17th Street North, Suite 900
Arlington, VA 22209
703-841-3229
esfi.org

Energy Information Administration

1000 Independence Ave. SW
Washington, DC 20585
eia.gov

Energy Kids Page

eia.gov/kids

How Stuff Works

4235 Redwood Ave.
Marina Del Rey, CA 90066
howstuffworks.com

Institute of Electrical and Electronics Engineers

445 Hoes Lane
Piscataway, NJ 08854-4141
Telephone: 732-981-0060
iee.org

National Energy Education Development Project

8408 Kao Circle
Manassas, VA 20110
Telephone: 703-257-1117
need.org

North American Electric Reliability Corporation

1325 G St. NW, Suite 600
Washington, DC 20005-3801
Telephone: 202-400-3000
nerc.com

Safe Electricity.org

4440 Ash Grove Dr., Suite B
Springfield, IL 62711
safeelectricity.org

Society of Women Engineers (SWE)

130 East Randolph Street, Suite 3500
Chicago, IL 60601
Telephone: 312.596.5223
swe.org

U.S. Department of Energy

1000 Independence Ave. SW
Washington, DC 20585
Telephone: 202-586-5000
energy.gov

Acknowledgments

Scouting America is grateful to the men and women serving on the National Merit Badge Subcommittee for the improvements made in updating this pamphlet.

Photo and Illustration Credits

The Franklin Institute Science Museum, courtesy—page 9 (*lightning rod*)

Getty Images—pages 2, 22, 24, 28, 29, 32 (*Illustrations: Marcie Rodriguez*), 33, 49, 50, 57, 58, 70, 71, and 77

Wikipedia.org, courtesy—page 14 (*Hauksbee demonstrating electrostatic generator*)

All other photos and illustrations not mentioned above are the property of or are protected by Scouting America.

Dan Bryant—pages 19 (*both*) and 38-41 (*steps for making a motor*)

John McDearmon—all illustrations on pages 6, 7, 12, 14, 16, 18, 20-21, 47, 48, 64-66

Brian Payne—pages 42-43 (*steps for making a rheostat*), 44 (*Scout looking at breaker box*), 53, 55, 60, 63, and 68



Scouting America is grateful to the Components, Packaging, and Manufacturing Technology Society of the Institute of Electrical and Electronics Engineers, and to former Scoutmaster and six-time National Scout Jamboree staff member Ralph W. Russell II of the IEEE Precollege Education Coordinating Committee for lending their time and expertise in the 2004 edition of the *Electricity* merit badge pamphlet.

Scouting America also wishes to thank the members of Mr. Russell's peer review committee.

- Scouter Michael N. Geselowitz, Ph.D., director of the IEEE History Center, who has served as a Cubmaster, den leader, pack committee member, troop committee member, and member of his council's Jewish Committee on Scouting
- Don Harris, Arnold Iturrieta, and William Harris, IEEE senior leaders in the electric power industry as well as key leaders in various local and national Scouting volunteer roles

- Walter Hyde, National Scout Jamboree (NSJ '23) Electricity MB staff lead and local volunteer
- Norman McFarland, who led and mentored Scouts to plan, design, test, and launch an experiment to NASA's International Space Station
- Scouter Al Mouton, president of AGM Systems
- Lee Reed Sr., safety specialist for Dominion Resources Services
- Rick Tavan, retired vice president of engineering of TIBCO Software, and Electricity merit badge counselor
- Dan Ward, principal engineer for Dominion Virginia Power
- Paul Wesling, vice president of publications for IEEE's CPMT Society, Eagle Scout, Scoutmaster, Venture crew leader, and recipient of Scouting America's Silver Beaver and Heroism awards



NOTES

UP YOUR MERIT BADGE GAME



Get ahead in Scouting with *Scout Life* magazine. It's loaded with the latest news on merit badges and other advancement tools. Plus, it's got outdoor adventure, games and comics, leadership tips, life skills, stories about other Scouts and more. It's just what you need to succeed.

Subscribe today at go.scoutlife.org/subscribe

Use promo code **SLMBP15** to get a special offer priced just for Scouts.

MERIT BADGE LIBRARY

Though intended as an aid to youth in Scouts BSA and qualified Venturers and Sea Scouts in meeting merit badge requirements, Scouting America's merit badge pamphlets are of general interest and are made available by many schools and public libraries.

Always check [scouting.org](https://www.scouting.org) for the latest merit badge requirements. If a Scout has already started working on a merit badge when new requirements for that merit badge are introduced, *they may continue to use the same pamphlet to earn the badge and fulfill the requirements therein*. In other words, the Scout need not start over again with the revised requirements.

American Business	Exploration	Plant Science
American Cultures	Family Life	Plumbing
American Heritage	Farm Mechanics	Pottery
American Indian Culture	Fingerprinting	Programming
American Labor	Fire Safety	Public Health
Animal Science	First Aid	Public Speaking
Animation	Fish & Wildlife Management	Pulp & Paper
Archaeology	Fishing	Radio
Archery	Fly-Fishing	Railroading
Architecture	Forestry	Reading
Art	Game Design	Reptile & Amphibian Study
Astronomy	Gardening	Rifle Shooting
Athletics	Genealogy	Robotics
Automotive Maintenance	Geocaching	Rowing
Aviation	Geology	Safety
Backpacking	Golf	Salesmanship
Basketry	Graphic Arts	Scholarship
Bird Study	Health Care Professions	Scouting Heritage
Bugling	Hiking	Scuba Diving
Camping	Home Repairs	Sculpture
Canoeing	Horsemanship	Search & Rescue
Chemistry	Insect Study	Shotgun Shooting
Chess	Inventing	Signs, Signals, Codes
Citizenship in the Community	Journalism	Skating
Citizenship in the Nation	Kayaking	Small-Boat Sailing
Citizenship in Society	Landscape Architecture	Snow Sports
Citizenship in the World	Law	Soil & Water Conservation
Climbing	Leatherwork	Space Exploration
Coin Collecting	Lifesaving	Sports
Collections	Mammal Study	Stamp Collecting
Communication	Metalwork	Surveying
Composite Materials	Mining in Society	Sustainability
Cooking	Model Design and Building	Swimming
Crime Prevention	Motorboating	Textile
Cycling	Moviemaking	Theater
Dentistry	Multisport	Traffic Safety
Digital Technology	Music	Truck Transportation
Disabilities Awareness	Nature	Veterinary Medicine
Dog Care	Nuclear Science	Water Sports
Drafting	Oceanography	Weather
Electricity	Orienteering	Welding
Electronics	Painting	Whitewater
Emergency Preparedness	Personal Fitness	Wilderness Survival
Energy	Personal Management	Wood Carving
Engineering	Pets	Woodwork
Entrepreneurship	Photography	
Environmental Science	Pioneering	

SCOUTING AMERICA

To place an order,
call **800-323-0736** or go to
scoutshop.org



EAGLE SCOUT



THE SUMMIT



SEA BASE



PHILMONT SCOUT RANCH



NORTHERN TIER

O N THE ROAD TO HIGH ADVENTURE

Discovery is at the heart of Scouting. We believe every adventure helps us uncover a little more about ourselves. Scouting builds the foundations for courage, resilience, and character, preparing youth for a lifetime of leadership. The path is yours to forge. Who knows what you'll discover?

SKU 656202



7 30176 35107 0

35886

2026 Printing



Certified Chain of Custody
Promoting Sustainable Forestry
www.cofc.org
SFI-01268

